


Particulars	22" EVIEW Ventilator SS
Wind Velocity	08 km/h
Air Absorption	@ 6.5 km/h
Cubic Feet Per Minute (CFM)	1972
Revolution Per Minute (RPM)	540 - 560
Material	SS 430/304
Rivet	SS 430/304
Vanes Thickness	0.50 mm
Top Plate	0.50 mm
Base	PP of 3.00 mm
No. of Bearings	2
Quality Of Bearings	6201/6202
Sealed/Not Sealed	Sealed
Lubricated/ Self Lubricated	Self
No. Of Outer Wings	24
No. Exhaust Wings	6
Design of Wings	Double Folded
Technology	Double Exhaust
Weight Of Top	4.85 Kg
Colour	Bright Silver
Roof adaptor	FRP with Gel pre fabricated roof matching of each area the unit is installed or Metal roof adaptor depending on suitability

Turbo comes with an option of PP material for corrosive and costal areas for longer life

TURBO VENTILATORS DETAILS



Double Exhaust Wind drives turbo SS from Eview Global Pvt Ltd

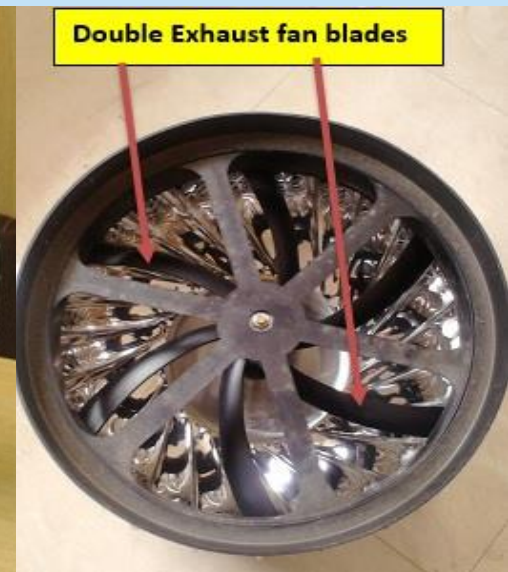

Double Exhaust fan blades

